

CUT SHEET

Strong Man Strong Block

Where there's construction, there's debris. And where there's debris, there's potential for danger and injury. Avoid this potential by using the Strong Man Debris and Spillage Containment Netting. Made from a high-tenacity knotless polypropylene netting with debris liner, this product wraps your building, safely protecting workers, pedestrians, and nearby structures. The perimeter edges include sewn reinforced webbing & grommets for extra strength and can be custom-sized and fabricated to meet your project requirements.

FEATURES

- ▶ Made from high tenacity knotless polypropylene net with debris liner
- ▶ Strong Block debris net systems are custom sized and fabricated to meet your project requirements
- ▶ Base net: 2.5" square net
- ▶ Debris net liner: 3/8" or 1/16" options
- ▶ Net Options: 2,000 lb., 5,000 lb., 10,000 lb. rating
- ▶ Perimeter edges include sewn reinforced webbing & grommets
- ▶ Meets ANSI A10.37 for debris containment during construction & demolition
- ▶ Complies with OSHA regulations for debris protection
- ▶ Extra UV inhibitors for added life expectancy
- ▶ Flame Retardant nets available & made to order

USES

- ▶ Prevents small & middle sized debris from falling during construction, rehab & demolition
- ▶ Prevents tools and other job-site items from falling
- ▶ Provides cutting edge protection
- ▶ Protects pedestrians & adjacent properties on or near job-sites from falling debris
- ▶ Durable, reliable, long-lasting
- ▶ All nets are tested and approved
- ▶ Available in black, gray and tan

SIZES – Black, Gray or Tan (1/box)

- ▶ 2,000 LB Net Rating, 2" knotless polypropylene base net, 3/8" or 1/16" debris net liner
- ▶ 5,000 LB Net Rating, 2.5" knotless polypropylene base net, 3/8" or 1/16" debris net liner
- ▶ 10,000 LB Net Rating, 2.5" knotless polypropylene base net, 3/8" or 1/16" debris net liner

** Specifications subject to change.*



SAFETY FIRST. GO STRONG.

www.strongman.com

(800) 950-6999



MEMBER | ACIDI, SAIA, STAFDA, IFAI

STRONG MAN® SAFETY PRODUCTS CORP.

Pompton Plains, NJ | Houston, TX | Los Angeles, CA

1-800-950-6999 | strongman.com | sales@strongman.com

© 2018 Strong Man Safety Products Corp.


CUT SHEET

STRONG BLOCK - DEBRIS NET SPECIFICATIONS

Style	Raschel Knotless Netting
Fiber	High Tenacity, Polypropylene (HTPP)
Cord Diameter	3/16 inch (5 mm)
Mesh Size	2 1/2 inch (60 mm) square opening
Load Test, Max	6000 lb (2700 kg)
Weight	0.0528 lb/ft ² (258 gm ²)
Melting Point	320°F (160°C)
UV	Extra UV Stabilizers added
Colors	Black, Gray, Sand




Black structural netting with black liner

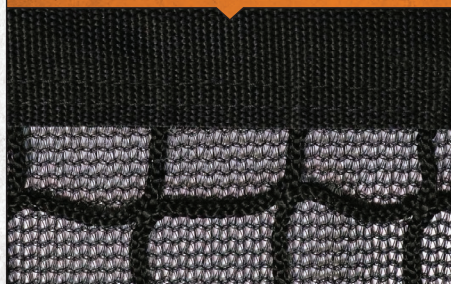


Strong Block panels are layered and joined together at the border with 75 mm HTPP webbing and then double-stitched with polyester thread.



3/8" Knitted Polyester



1/16" Knitted Polyethylene



SAFETY FIRST. GO STRONG.

www.strongman.com

(800) 950-6999



MEMBER ACDI, SAIA, STAFDA, IFAI

STRONG MAN® SAFETY PRODUCTS CORP.

Pompton Plains, NJ | Houston, TX | Los Angeles, CA

1-800-950-6999 | strongman.com | sales@strongman.com

© 2018 Strong Man Safety Products Corp.