



Square-Pattern String Reinforced Polyethylene

Features

- ◆ Fire-Retardant: Meets NFPA 701 Method II & Boston Fire Marshal Test BFD IX-1
- ◆ FR Material: Milky White
- ◆ Non-FR Material: Clear
- ◆ 6 mil and 10 mil thickness available
- ◆ UV-treated & long lasting
- ◆ Flexible in cold temperatures
- ◆ Durable with superior strength
- ◆ Puncture & tear-resistant





Uses

- ◆ Temporary Building, Scaffold & Construction Enclosure
- ◆ Wind & Weather Enclosure
- ◆ Abatement, Containment & Ground Cover
- ◆ Temporary Heating Enclosure
- ◆ Demolition, Dust & Debris Control

The uses of these products are not limited to the above. Local, state or federal authorities should be consulted concerning the proper use and installation of this product.

Availability		
Sizes	Clear Non-Fire Retardent	White Fire Retardent
10' x 100' 6 Mil		✓
20' x 100' 6 Mil	✓	✓
20' x 100' 10 Mil	✓	✓
40' x 100' 6 Mil	✓	✓
40' x 100' 10 Mil	✓	✓

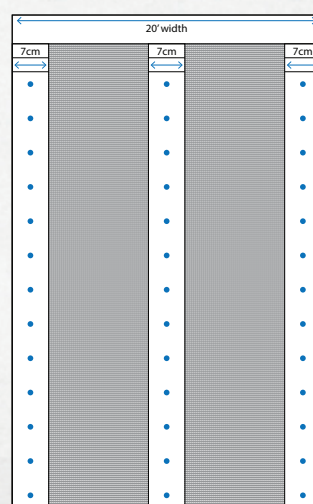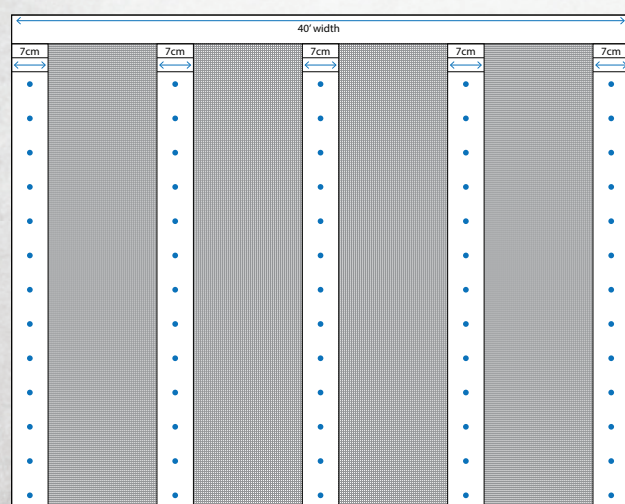

Diagrams represent the 10 mil fire retardant and the 6 mil and 10 mil non-fire retardant string poly only. These do not apply to the 6 mil fire retardant string poly.

STRONG MAN SAFETY PRODUCTS

Pompton Plains, NJ | Houston, TX | Cerritos, CA
 1-800-950-6999 | strongman.com | sales@strongman.com

The uses of these products are not limited to the above. Conditions that could affect the safe installation of this material may vary from site to site. Purchaser/user is solely responsible for the proper installation and testing at the installation as may be appropriate or required by local, state or federal regulations. The Purchaser/user must have a qualified person inspect the installation and submit any questions regarding the particular application of the product to a qualified engineer. Strong Man Safety Products disclaims responsibility for the results of any inappropriate or inadequate installation.