


# Pour-in-Place Safety Netting

Safety netting for floor openings in high-rise construction



**Strong Man** Pour-In-Place Safety Netting offers the ideal solution for fall protection in concrete construction applications involving floor openings with a risk of falling through. The four sides of the net are set into the surrounding poured concrete structure, such as in elevator shafts, and is cut away when construction is complete, and the opening is no longer a hazard.

Pour-In-Place nets are used over stairways, elevators, and duct openings for passive fall protection, supplementing or replacing temporary floor covers. The durable Nylon 6 netting absorbs a dynamic load of 1,300 lbs.

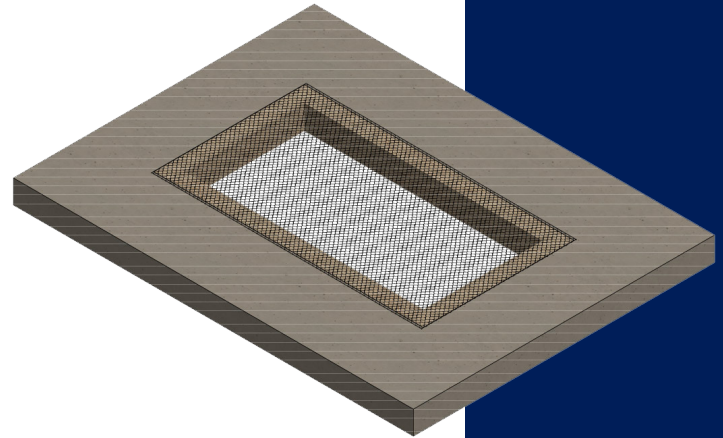



- Protect personnel from falls
- Contains tools and material from fall-through
- Installed quickly with hand tools
- Easily removed when no longer needed

## Comply with OSHA 1926.501(b)(4)

Employees must be protected from fall-through hazards when the hole is more than six feet above the lower level. The Pour-in-Place net serves as a cover that satisfies the need for protection when installed per the instructions.

## Simple Pour-in Process

The netting is placed across the opening, spanning a minimum of one foot on each side or until it extends past either piece of rebar, then fastened with nylon ties to the respective rebar for temporary fixation while the concrete is poured. Once dried, the net is locked securely until the opening is no longer an issue. It can be easily removed afterwards by cutting back the netting flush with the concrete.

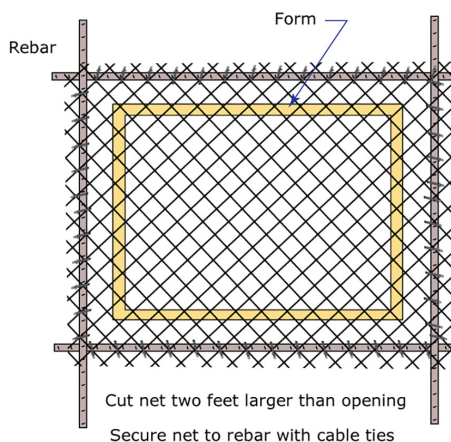

**STRONG MAN SAFETY PRODUCTS**  
800.950.6999 • **STRONGMAN.COM**



Copyright © SMSP  
All Rights Reserved  
CO23-01.1



Strong Man Safety Products  
240 West Parkway  
Pompton Plains, NJ 07444

strongman.com  
sales@strongman.com  
800.950.6999

Spec. Rev. 042518

# Specifications for Pour-In-Place Safety Net



Floor hole fall protection net for pour-in-place concrete builds.

## Product Highlights

- PSN #120 knotted nylon safety net
- Secures open floor hazards
- Protects personnel from falls
- Contains material from fall throughs
- Sized on-site for a perfect fit
- Easily installed with hand tools
- Position over or under the floor opening form
- Easily removed when no longer required

Pour-In-Place Safety Net System secure open floor hazards with fall-through net protection. The simple yet effective safety net system protects workers from fall throughs, and contains material, tools, and debris at floor level.

The pour-in-place high strength safety net is cut on-site and installed over a floor opening form with its perimeter secured to the surrounding rebar. The floor is poured resulting in the safety net securely bedded on all sides.

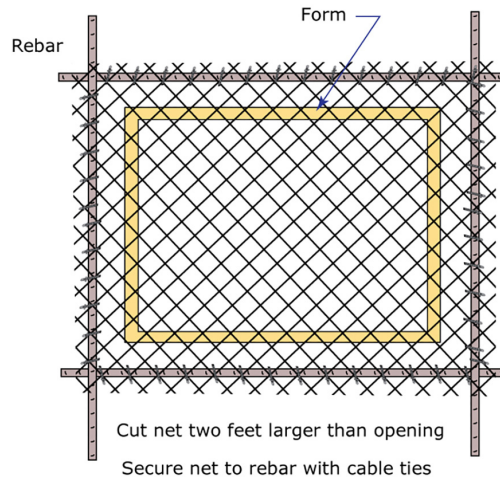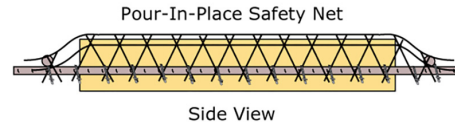

Pour-In-Place nets are used over stairway, elevator, and duct openings for passive fall protection, supplementing or replacing temporary floor covers. The high strength PSN rated nylon netting will absorb a dynamic load of 1300 lbs. When no longer required, the netting is simply cut away, allowing for continued construction. Standard and custom sized roll netting is available.

- Material .....PSN #120 x 3-1/2 inch
- Type .....High Tenacity Nylon
- FR Rating .....NFPA 701 Test Method 2
- Dynamic Load .....1300 lb (590 kg)
- Melting Point .....489°F (254°C)
- Color .....Black
- Roll Sizes .....8 ft x 50 ft, 8 ft x 100 ft

