



Strong Man Safety Products
240 West Parkway
Pompton Plains, NJ 07444

www.strongman.com
sales@strongman.com

800-950-6999
973-831-1525 Fax

Spec. Rev. 042518

Specifications for Pour-In-Place Safety Net



Floor hole fall protection net for pour-in-place concrete builds.

Product Highlights

- PSN #120 knotted nylon safety net
- Secures open floor hazards
- Protects personnel from falls
- Contains material from fall throughs
- Sized on-site for a perfect fit
- Easily installed with hand tools
- Position over or under the floor opening form
- Easily removed when no longer required

Pour-In-Place Safety Net System secure open floor hazards with fall-through net protection. The simple yet effective safety net system protects workers from fall throughs, and contains material, tools, and debris at floor level.

The pour-in-place high strength safety net is cut on-site and installed over a floor opening form with its perimeter secured to the surrounding rebar. The floor is poured resulting in the safety net securely bedded on all sides.

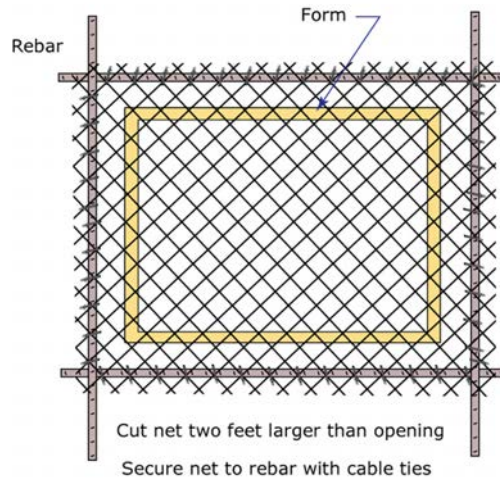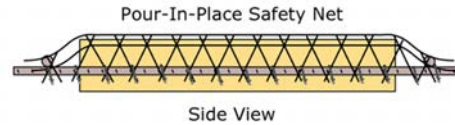

Pour-In-Place nets are used over stairway, elevator, and duct openings for passive fall protection, supplementing or replacing temporary floor covers. The high strength PSN rated nylon netting will absorb a dynamic load of 1300 lbs. When no longer required, the netting is simply cut away, allowing for continued construction. Standard and custom sized roll netting is available.

- MaterialPSN #120 x 3-1/2 inch
- TypeHigh Tenacity Nylon
- FR RatingNFPA 701 Test Method 2
- Dynamic Load1300 lb (590 kg)
- Melting Point489°F (254°C)
- ColorBlack
- Roll Sizes8 ft x 50 ft, 8 ft x 100 ft

